

**MATH 158
FINAL EXAM
17 DECEMBER 2015**

Name : _____

Comment (2023): this exam is from an older version of this course, taught at Brown. There are some differences of style and emphasis compared to Math 252 here. Questions about material we haven't covered are crossed out in this document.

- The time limit is three hours.
- No calculators are permitted.
- You are permitted one page of notes, front and back.
- The textbook's summary tables for the systems we have studied are provided at the back.
- For any problem asking you to write a program, you may write in a language of your choice or in pseudocode, as long as your answer is sufficiently specific to tell the runtime of the program.
- Point values are as indicated in the table below.

1	/10	2	/10
3	/10	4	/10
5	/10	6	/10
7	/10	8	/10
9	/10	10	/10
11	/15	12	/15
		Σ	/130

- (1) Consider the elliptic curve $Y^2 = X^3 + X - 1$ over $\mathbb{Z}/5$.
- (a) Determine the number of points on this curve (including the point \mathcal{O}).

- (b) Determine the order of the point $P = (1, 1)$.

(2) Explain briefly why each of the following choices is made in DSA. Be specific about which mathematical facts would make the algorithm either incorrect or insecure otherwise.

(a) The number q is a *prime* number.

(b) The numbers p, q satisfy $p \equiv 1 \pmod{q}$.

(c) The number k is selected *at random*.

- (3) Alice's RSA public key has modulus N . Bob cannot remember whether her encrypting exponent is 16 or 27. In a well-meaning but very foolish blunder, he decides to encrypt his message m with *both* possible encrypting exponents, creating c_1 (using $e = 16$) and c_2 (using $e = 27$). Bob uses the correct modulus N in both cases. He then sends both c_1 and c_2 to Alice, with an explanation of what happened. Eve intercepts c_1 and c_2 , as well as the information of which exponent was used to create which ciphertext.

Express m in terms of c_1 and c_2 using arithmetic modulo N . This will show that Eve can learn the plaintext m without much effort.

- (4) The following function definition is meant to calculate the sum of two points P, Q on the elliptic curve $Y^2 = X^3 + AX + B$ over \mathbf{Z}/p , but it contains a flaw. Explain the case in which the code will not work properly, and how to fix it.

Assumptions: each point (P, Q , or the return value) is either a pair (x, y) of two integers with $0 \leq x, y < p$, or the number 0 (for the point \mathcal{O}). You may assume that both P and Q do in fact lie on the curve defined by A and B . Also assume that `inv_mod(a,m)` is a correctly implemented function that returns the inverse of a modulo m whenever a is a unit modulo m , but which results in an error if a is not a unit modulo m .

```
def add(P,Q,A,B,p):
    if P==0: return Q
    if Q==0: return P
    if P[0] == Q[0] and P[1] != Q[1]: return 0
    if P[0] != Q[0]:
        rise = (P[1] - Q[1]) % p
        run = (P[0] - Q[0]) % p
    else:
        rise = (3*P[0]*P[0] + A) % p
        run = (2*P[1]) % p
    slope = (rise*inv_mod(run,p)) % p
    y_int = (P[1] - P[0]*slope) % p
    x = (slope*slope - P[0]-Q[0]) % p
    y = (-(slope*x + y_int)) % p
    return (x,y)
```

- (5) Write a function `pickg(p,q)` with the following behavior: if p, q are both prime numbers, then the return value must be either a number a between 1 and $p - 1$ inclusive with order q modulo p , or the number -1 if no such integer a exists. Your function may be randomized. For full points the (expected value of the) number of arithmetic operations performed by the function must be $\mathcal{O}(\log p)$.

- (6) Suppose that Samantha is using ECDSA parameters with $q = 7$. She has published two valid signatures: $(2, 3)$ for the document $d = 4$, and $(2, 6)$ for the document $d' = 5$. Eve learns that she used the same random element e to produce both signatures. Determine Samantha's secret signing key, s .

Note. I am withholding the information of Samantha's public key and the system parameters for this problem, since the numbers are small enough that a brute force solution would be possible. In reality, of course, Eve would know all of this, but q would also be large enough that brute force would not be feasible.

- (7) Suppose that Eve has intercepted a ciphertext from Bob to Alice. In addition, she knows by other means that the plaintext is one of only 1000 possibilities (for example, it might specify a landmark where Alice and Bob will meet, written in a predictable format and chosen from a short list of options). As usual, Eve knows Alice's public key, but not her private key.
- (a) Suppose that the cryptosystem being used is RSA. Explain how Eve can very quickly identify for certain which of the 1000 candidates is the true plaintext.

Comment (2023): The following problem concerns a cryptosystem we are not discussing this semester.

- (b) Suppose that the cryptosystem being used is Menezes-Vanstone (table 6.13). Describe a procedure Eve could use that, *with very high probability*, will pick out the correct plaintext from the list. (More formally: your procedure should have the property that if the 999 false plaintexts were chosen uniformly at random, then the probability of choosing one of them should be negligible.)

- (8) The NTru procedure (table 7.4) stipulates that p and q should be chosen such that $\text{gcd}(p, q) = 1$. Suppose that parameters are chosen that do not obey this rule, and instead $p \mid q$. In this case, the system is completely insecure. Write a function that Eve could use to can break it. Specifically: write a function `extract(e, N, p, q, d, h)` that efficiently extracts the plaintext \mathbf{m} from any cipher text \mathbf{e} , given only the public key and system parameters, and assuming that p divides q . The arguments \mathbf{e} and \mathbf{h} will be given as lists of N integers. The coefficients in your answer should be either centerlifted modulo p or reduced modulo p in the typical way.

- (9) Suppose that P, Q are two points on an elliptic curve over $\mathbf{Z}/9719$ (the number $p = 9719$ is prime). The order of the elliptic curve is a prime number q , and neither P nor Q is \mathcal{O} . Alice has constructed the following two lists of points.

$$[\mathcal{O}, P, 2P, \dots, 99P]$$

$$[Q, Q \ominus 100P, Q \ominus 200P, \dots, Q \ominus 9900P]$$

Prove that there must exist a common element between these two lists, and describe how finding this common element can be used to find an integer n such that $Q = nP$.

- (10) Suppose that the NTRU cryptosystem (Table 7.4) is modified in the following ways:
- The single integer d in the parameters is replaced with three integers d_1, d_2, d_3 such that $d_1 > d_2 > d_3$. The requirement that $q > (6d + 1)p$ is removed.
 - When Alice chooses \mathbf{f} , she chooses it from $\mathcal{T}(d_1 + 1, d_1)$.
 - When Alice chooses \mathbf{g} , she chooses it from $\mathcal{T}(d_2, d_2)$.
 - When Bob chooses \mathbf{r} , he chooses it from $\mathcal{T}(d_3, d_3)$.

Derive an inequality of the form “ $q > \dots$ ” (to replace $q > (6d + 1)p$ from the original version) in terms of d_1, d_2, d_3 (not all three of which must necessarily be used) and the other public parameters, such that decryption is guaranteed to succeed as long as this inequality holds.

- (11) Samantha and Victor agree to the following digital signature scheme. The public parameters and key creation are identical to those of ECDSA. The verification procedure is different: to decide whether (s_1, s_2) is a valid signature for a document d , Victor computes

$$\begin{aligned}w_1 &\equiv s_1^{-1}d \pmod{q} \\w_2 &\equiv s_1^{-1}s_2 \pmod{q},\end{aligned}$$

then he check to see whether or not

$$x(w_1G \oplus w_2V) \% q = s_1.$$

If so, he regards (s_1, s_2) as a valid signature for d .

- (a) Describe a signing procedure that Samantha can follow to produce a valid signature on a given document d . The procedure should be randomized in such a way that it will generate different signatures if executed repeatedly on the same document.

Comment (2023): I would not ask the question below this year without some additional hints, since we put less emphasis on “blind forgery” this year. But you may still wish to attempt it; for a hint, find the homework problems on blind forgery in Elgamal and DSA.

- (b) Describe a forgery procedure that Eve can follow to create a signature (s_1, s_2) and a document d such that (s_1, s_2) is a valid signature for d under this scheme. Note that Eve does not need to be able to choose d in advance. The procedure should be randomized in such a way that it can generate many different forgeries (on many different documents).

(12) Comment (2022) we are not discussing this factoring method in this semester's course.

Suppose that n is an odd integer such that exactly $\frac{1}{32}$ of all units modulo n are squares (i.e. are congruent to some integer square modulo n). Alice wishes to factor n . Suppose that Alice chooses m *distinct* elements a_1, a_2, \dots, a_m of $\{1, 2, \dots, \frac{n-1}{2}\}$ at random.


- (a) Suppose that Alice discovers that $a_i^2 \equiv a_j^2 \pmod{n}$ for some $i \neq j$. Write a function `factor(n, ai, aj)` which returns a proper factor (i.e. a factor besides 1 or n) of n given the values a_i and a_j whose squares are congruent. For full credit, your function should perform no more than $\mathcal{O}(\log n)$ arithmetic operations.

(b) Assuming that all m of these elements a_i are (distinct) *units* modulo n , prove that the probability that $a_i^2 \equiv a_j^2 \pmod{n}$ for *some* $i \neq j$ is at least $1 - e^{-32\binom{m}{2}/\phi(n)}$. You may assume without proof that $e^{-x} \geq 1 - x$ for all real numbers x . You may also assume that the values $a_i^2 \pmod{n}$ is equally likely to be any of the squares modulo n .

(c) Suppose that the assumption in part (b) fails, and in fact one of the a_i is *not* a unit modulo n . This is a feature, not a bug: describe how Alice can quickly find a proper factor of n in this case, before she even looks for any collisions.

(additional space for work)

“**Bonus**” (to keep me happy during grading, not for real points): fill in cryptography-related (or totally unrelated) dialog for this comic.

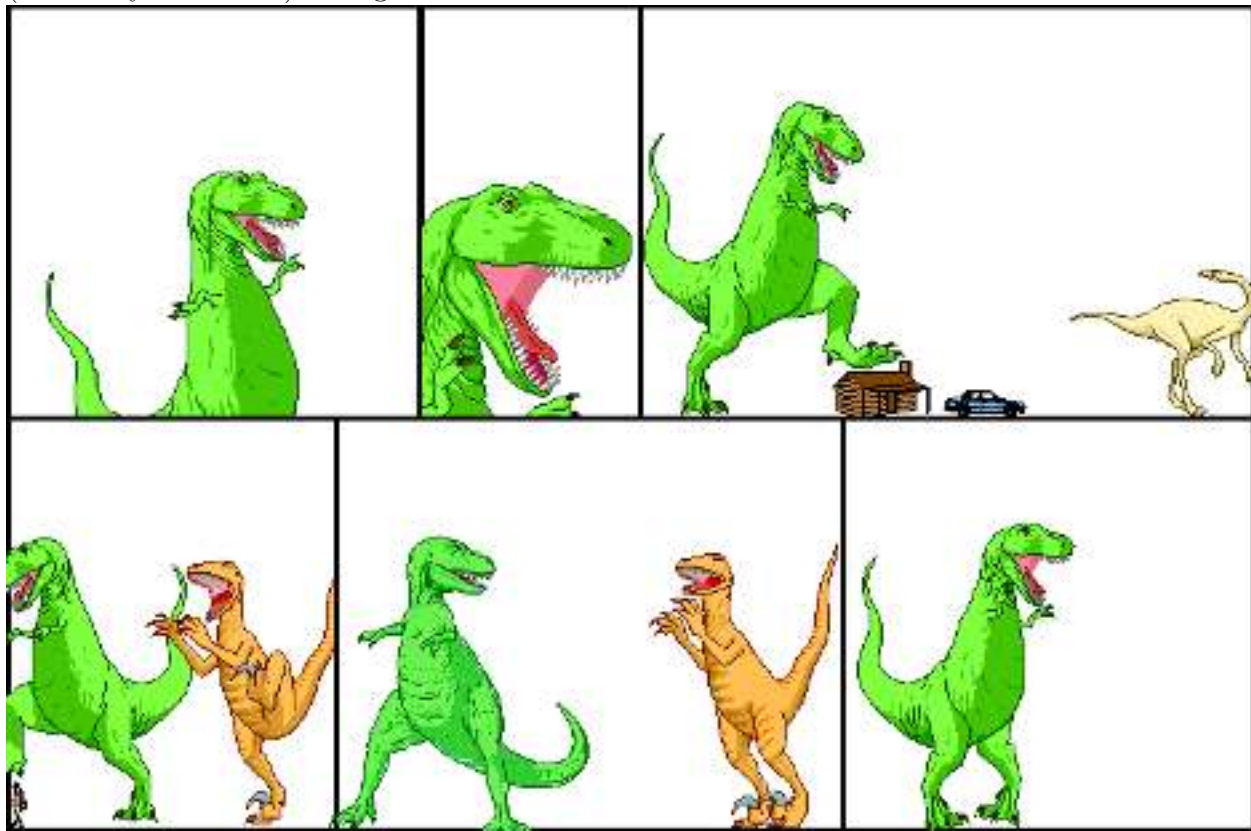

Public parameter creation	
A trusted party chooses and publishes a (large) prime p and an integer g having large prime order in \mathbb{F}_p^* .	
Private computations	
Alice	Bob
Choose a secret integer a . Compute $A = g^a \pmod{p}$.	Choose a secret integer b . Compute $B = g^b \pmod{p}$.
Public exchange of values	
Alice sends A to Bob $\xrightarrow{\hspace{2cm}}$ A $B \xleftarrow{\hspace{2cm}}$ Bob sends B to Alice	
Further private computations	
Alice	Bob
Compute the number $B^a \pmod{p}$. The shared secret value is $B^a = (g^b)^a = g^{ab} = (g^a)^b = A^b \pmod{p}$.	Compute the number $A^b \pmod{p}$.

Table 2.2: Diffie-Hellman key exchange

Public parameter creation	
A trusted party chooses and publishes a large prime p and an element g modulo p of large (prime) order.	
Alice	Bob
Key creation	
Choose private key $1 \leq a \leq p-1$. Compute $A = g^a \pmod{p}$. Publish the public key A .	
Encryption	
Choose plaintext m . Choose random element k . Use Alice's public key A to compute $c_1 = g^k \pmod{p}$ and $c_2 = mA^k \pmod{p}$. Send ciphertext (c_1, c_2) to Alice.	
Decryption	
Compute $(c_1^a)^{-1} \cdot c_2 \pmod{p}$. This quantity is equal to m .	

Table 2.3: ElGamal key creation, encryption, and decryption

Bob	Alice
Key creation	
Choose secret primes p and q . Choose encryption exponent e with $\gcd(e, (p-1)(q-1)) = 1$. Publish $N = pq$ and e .	
Encryption	
Choose plaintext m . Use Bob's public key (N, e) to compute $c = m^e \pmod{N}$. Send ciphertext c to Bob.	
Decryption	
Compute d satisfying $ed = 1 \pmod{(p-1)(q-1)}$. Compute $m' = c^d \pmod{N}$. Then m' equals the plaintext m .	

Table 3.1: RSA key creation, encryption, and decryption

Samantha	Victor
Key creation	
Choose secret primes p and q . Choose verification exponent e with $\gcd(e, (p-1)(q-1)) = 1$. Publish $N = pq$ and e .	
Signing	
Compute d satisfying $de = 1 \pmod{(p-1)(q-1)}$. Sign document D by computing $S = D^d \pmod{N}$.	
Verification	
Compute $S^e \pmod{N}$ and verify that it is equal to D .	

Table 4.1: RSA digital signatures

Public parameter creation	
A trusted party chooses and publishes a large prime p and primitive root g modulo p .	
Samantha	Victor
Key creation	
Choose secret signing key $1 \leq a \leq p-1$. Compute $A = g^a \pmod{p}$. Publish the verification key A .	
Signing	
Choose document $D \pmod{p}$. Choose random element $1 < k < p$ satisfying $\gcd(k, p-1) = 1$. Compute signature $S_1 = g^k \pmod{p}$ and $S_2 = (D - aS_1)k^{-1} \pmod{p-1}$.	
Verification	
Compute $A^{S_1} S_2^2 \pmod{p}$. Verify that it is equal to $g^D \pmod{p}$.	

Table 4.2: The ElGamal digital signature algorithm

Public parameter creation	
A trusted party chooses and publishes large primes p and q satisfying $p \equiv 1 \pmod{q}$ and an element g of order q modulo p .	
Samantha	Victor
Key creation	
Choose secret signing key $1 \leq a \leq q-1$. Compute $A = g^a \pmod{p}$. Publish the verification key A .	
Signing	
Choose document $D \pmod{q}$. Choose random element $1 < k < q$. Compute signature $S_1 = (g^k \pmod{p}) \pmod{q}$ and $S_2 = (D + aS_1)k^{-1} \pmod{q}$.	
Verification	
Compute $V = DS_2^{-1} \pmod{q}$ and $V_1 = S_1 S_1^{-1} \pmod{q}$. Verify that $(g^{V_1} A^{V_2} \pmod{p}) \pmod{q} = S_1$.	

Table 4.3: The digital signature algorithm (DSA)

Public parameter creation	
A trusted party chooses and publishes a (large) prime p , an elliptic curve E over \mathbb{F}_p , and a point P in $E(\mathbb{F}_p)$.	
Private computations	
Alice	Bob
Chooses a secret integer n_A . Computes the point $Q_A = n_A P$.	Chooses a secret integer n_B . Computes the point $Q_B = n_B P$.
Public exchange of values	
Alice sends Q_A to Bob $\xrightarrow{\quad}$ Q_A Q_B $\xleftarrow{\quad}$ Bob sends Q_B to Alice	
Further private computations	
Alice	Bob
Computes the point $n_A Q_B$. The shared secret value is $n_A Q_B = n_A(n_B P) = n_B(n_A P) = n_B Q_A$.	Computes the point $n_B Q_A$.

Table 6.5: Diffie-Hellman key exchange using elliptic curves

Public parameter creation	
A trusted party chooses a finite field \mathbb{F}_p , an elliptic curve E/\mathbb{F}_p , and a point $G \in E(\mathbb{F}_p)$ of large prime order q .	
Samantha	Victor
Key creation	
Choose secret signing key $1 < s < q - 1$. Compute $V = sG \in E(\mathbb{F}_p)$. Publish the verification key V .	
Signing	
Choose document $d \bmod q$. Choose random element $r \bmod q$. Compute $rG \in E(\mathbb{F}_p)$ and then, $s_1 = r(G) \bmod q$ and $s_2 = (d + sr)r^{-1} \bmod q$. Publish the signature (s_1, s_2) .	
Verification	
Compute $v_1 = ds_2^{-1} \bmod q$ and $v_2 = s_1 s_2^{-1} \bmod q$. Compute $v_1 G + v_2 V \in E(\mathbb{F}_p)$ and verify that $x(v_1 G + v_2 V) \bmod q = x$.	

Table 6.7: The elliptic curve digital signature algorithm (ECDSA)

Public Parameter Creation	
A trusted party chooses and publishes a (large) prime p , an elliptic curve E over \mathbb{F}_p , and a point P in $E(\mathbb{F}_p)$.	
Alice	Bob
Key Creation	
Chooses a secret multiplier n_A . Computes $Q_A = n_A P$. Publishes the public key Q_A .	
Encryption	
	Chooses plaintext values m_1 and m_2 modulo p . Chooses a random number k . Computes $R = kP$. Computes $S = kQ_A$ and writes it as $S = (x_S, y_S)$. Sets $c_1 = x_S m_1 \bmod p$ and $c_2 = y_S m_2 \bmod p$. Sends ciphertext (R, c_1, c_2) to Alice.
Decryption	
Computes $T = n_A R$ and writes it as $T = (x_T, y_T)$. Sets $m_1' = x_T^{-1} c_1 \bmod p$ and $m_2' = y_T^{-1} c_2 \bmod p$. Then $m_1' = m_1$ and $m_2' = m_2$.	

Table 6.13: Menezes-Vanstone variant of ElGamal (Exercises 6.17, 6.18)

Alice	Bob
Key Creation	
Choose a large integer modulus q . Choose secret integers f and g with $f < \sqrt{q/2}$, $\sqrt{q/4} < g < \sqrt{q/2}$, and $\gcd(f, gg) = 1$. Compute $h = f^{-1}g \pmod{q}$. Publish the public key (q, h) .	
Encryption	
	Choose plaintext m with $m < \sqrt{q/4}$. Use Alice's public key (q, h) to compute $e = m^2 + h \pmod{q}$. Send ciphertext e to Alice.
Decryption	
Compute $a = fe \pmod{q}$ with $0 < a < q$. Compute $b = f^{-1}a \pmod{q}$ with $0 < b < q$. Then b is the plaintext m .	

Table 7.1: A congruential public key cryptosystem

Public parameter creation	
A trusted party chooses public parameters (N, p, q, d') with N and p prime, $\gcd(p, q) = \gcd(N, q) = 1$, and $q > (6d' + 1)p$.	
Alice	Bob
Key creation	
Choose private $f \in \mathcal{T}(d' + 1, d')$ that is invertible in R_q and R_p . Choose private $g \in \mathcal{T}(d', d')$. Compute F_q , the inverse of f in R_q . Compute F_p , the inverse of f in R_p . Publish the public key $h = F_q * g$.	
Encryption	
	Choose plaintext $m \in R_p$. Choose a random $r \in \mathcal{T}(d', d')$. Use Alice's public key h to compute $e = pr * h + m \pmod{q}$. Send ciphertext e to Alice.
Decryption	
Compute $f * e = pr * r + f * m \pmod{q}$. Center-lift to $a \in R$ and compute $m = F_p * a \pmod{p}$.	

Table 7.4: NTRU Encrypt: the NTRU public key cryptosystem